
JB Advanced Engineering Limited

"Powering Precision, Engineering the Future"

Complete Power Generation Solutions





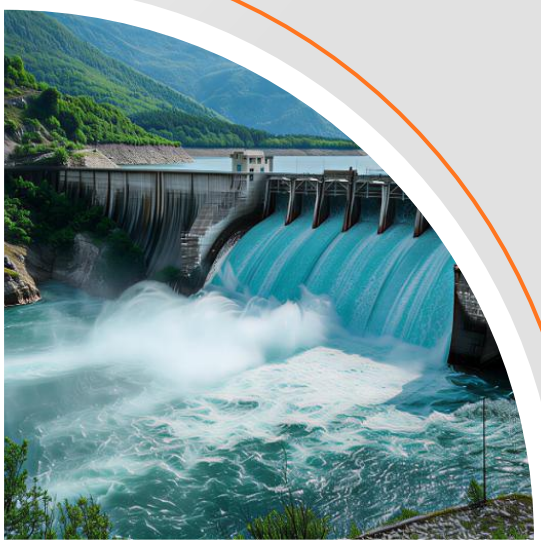



www.jbepower.com

Index

Sr. No.	Title	Page No.
1.	Our Vision, Mission & Goal	3
2.	The Advantage: Precision, Agility, and Trust	4
3.	Solutions We Deliver	5
4	Global Supply Chain & Strategic Alliances	6
5	Our Expertise Across Power Generation Sectors	7
5.1	Major Services	8
5.2	Turbine	9
5.3	Generator	11
5.4	Boiler	14
6	Reverse Engineering & Product Development	16
6.1	Reverse Engineering Project Portfolio	20
7.	Tribology & Total Lubrication Reliability Solutions	22
8.	Operational Governance: ‘Zero-Harm’ & Quality	24
9.	ESG Management	26
10	Successfully Executed Projects	27
11	Trusted By Industry Leaders	31
12	Central Office, Administration & Manufacturing Facility	32

1 Our Vision, Mission & Goal



Welcome to

JB Advanced Engineering Limited. (JBAEL)

Since the privatization of power generation in 2003, India has significantly expanded its installed capacity, largely supported by global equipment suppliers. While this growth delivered speed and cost efficiency, sustaining long-term performance now depends on reliability, operational excellence, and lifecycle-focused asset management to ensure consistently high power output.

Vision is to be a globally trusted engineering partner, recognized for technical excellence, responsible execution, and unwavering commitment to quality and safety. We aim to bridge global OEM standards with practical field-level execution, enabling our customers to achieve higher availability, optimized performance, and extended equipment life.

Goal is not limited to fixing problems, but to create lasting value — by enhancing reliability, modernizing aging assets, and supporting the transition toward efficient and responsible power generation. Guided by a zero-harm philosophy and strict quality governance, we remain committed to engineering solutions that serve both industry and society.

Mission is to provide integrated asset support services across thermal, hydro, gas, and nuclear power sectors. Through strong global partnerships, advanced diagnostics, skilled field services, and lifecycle-focused solutions, we help operators manage risk, control costs, and make informed decisions for long-term sustainability.

“We don’t just offer services; we build legacies of trust by ensuring your assets deliver reliable, high-output power for decades”.

Mr. Abhimanyu Arya
Managing Director

2. The Advantage: Precision, Agility, and Trust



Maximize Asset Availability:

Predictive diagnostics and rapid-response teams minimise unplanned outages.

Extended Asset lifecycle

Renovation & Modernization programs designed to defer massive Capital Expenditure.

Cost- Efficiency:

Global OEM-standard spares combined with localised execution.



Outcome: Peace of mind for stakeholders through risk-controlled asset management.



3. Solutions We Deliver



• Repair, Overhauling & Asset Restoration

Precision repair, overhauling, and life extension solutions for turbines, generators, and critical rotating assets.

• Erection, Commissioning & End-to-End Plant Execution



Complete electrical & mechanical erection, alignment, testing, commissioning, and execution support for critical plant systems.



• Inspection, Diagnostics & Expert Technical Supervision

Condition assessment, fault diagnostics, troubleshooting, and expert supervision to improve plant performance.

• Skilled Field Services & Long-Term Support



Deployment of experts for shutdowns, maintenance, and sustained field support.



• Spares Supply & Lifecycle Support

Reliable supply of critical spares backed by installation assistance and long-term lifecycle services.

• Global OEM Partnerships




Strategic access to certified equipment, genuine spares, and advanced engineering support through global alliances.



4

Global Supply Chain & Strategic Alliances

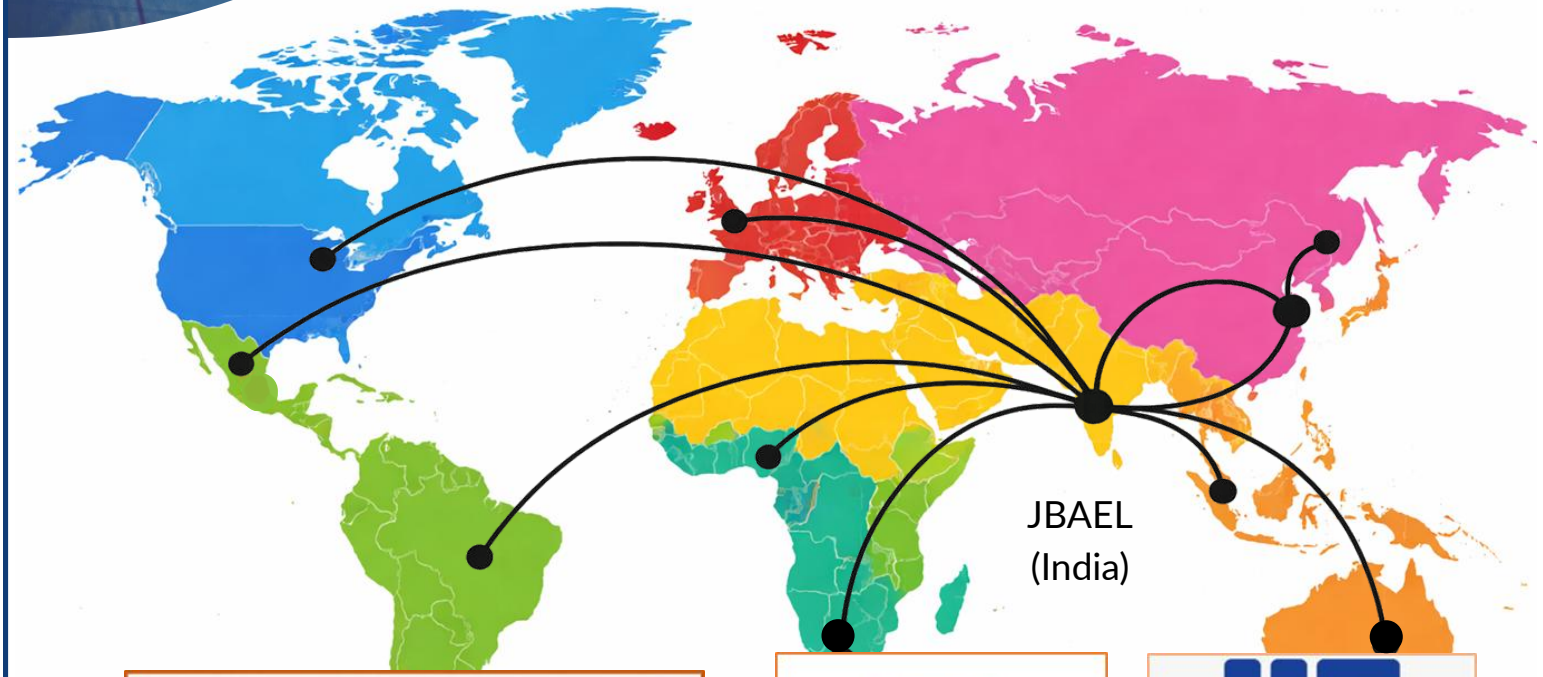

山东济南发电设备厂有限公司 JPEF
SHANDONG JINAN POWER EQUIPMENT FACTORY Co., Ltd

北京北重汽轮电机有限责任公司
BEIJING BEIZHONG STEAM TURBINE GENERATOR CO.,LTD.


DEC
东方电气
DONGFANG ELECTRIC

哈电集团
HARBIN ELECTRIC CORPORATION

• The Logistics Promise


- **• Direct Sourcing:** 100% verified genuine OEM spares
- **• Delivery:** B2B, B2C Handling including customs and inland transport
- **• Emergency Inventory:** Essential spares are kept ready at the JBAEL central store for quick support.

5. Our Expertise Across Power Generation Sectors

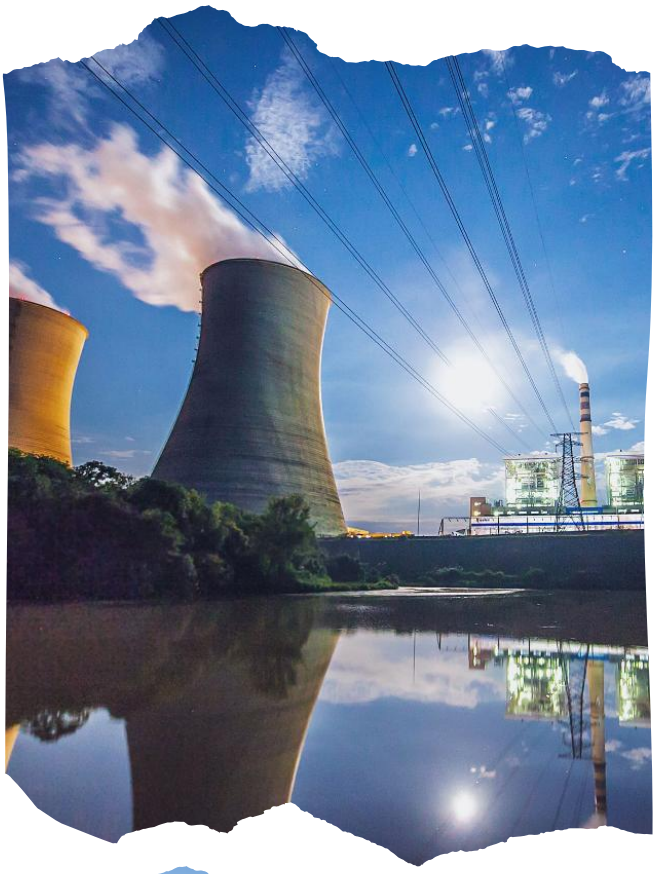


From Thermal and Hydro-based plants to Gas and Nuclear facilities, we bring deep domain expertise to every corner of the power generation landscape.

Our team delivers precision-driven engineering, inspection, and maintenance solutions tailored to the unique demands of each sector. With decades of experience and a commitment to operational excellence, we help power producers enhance reliability, extend asset life, and ensure safety at every stage. By integrating advanced technologies with proven industry practices, we support clients in building a more efficient, resilient, and sustainable energy future.

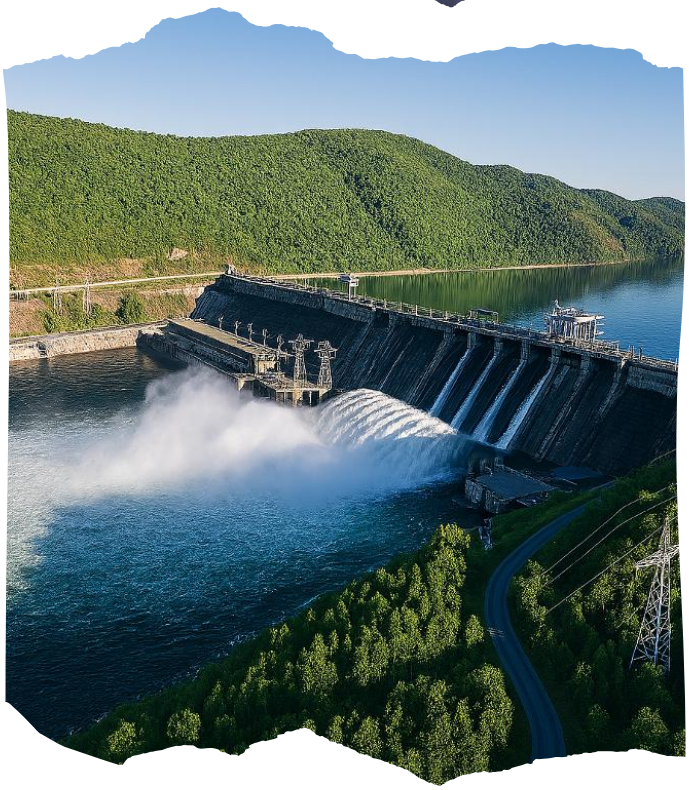



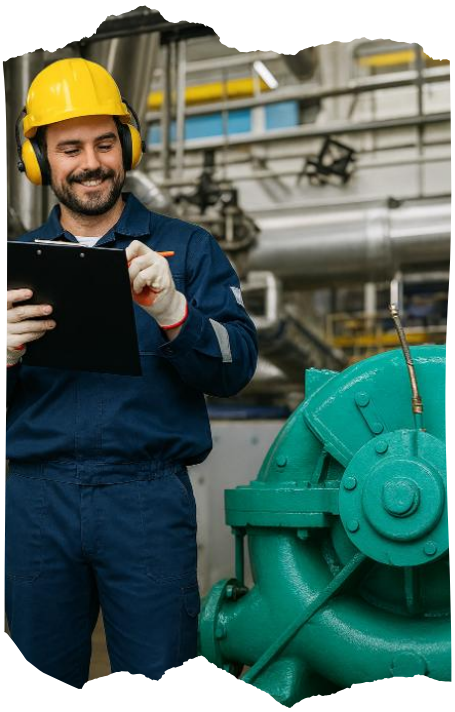

5.1 Major Services

We are a specialized power plant service company delivering end-to-end solutions in repairing, refurbishment, erection, commissioning, and testing of thermal, hydro and other power plant equipment. With strong technical expertise and industry experience, we ensure reliable performance, extended equipment life, and enhanced operational efficiency.







Our team is equipped to handle generators, turbines, and associated auxiliaries with precision and adherence to national & international standards. From detailed inspection and fault diagnosis to complete overhauling and final commissioning, we provide comprehensive support at every stage.



Our commitment to quality, safety, and timely execution makes us a trusted partner for power plant maintenance and modernization projects. We strive to deliver sustainable and cost-effective solutions that maximize plant availability and performance.



5.2 Turbine

Our Expertise

Erection Work:

- Verification of turbine components, spares, and documentation.
- Checking foundation levels, grouting, and alignment readiness.
- Installation of casing, rotor, blades, diaphragms, and seals.
- Precision alignment of turbine rotor with generator and setting of clearances.
- Installation of steam/water lines, lubrication, cooling, and control systems.

Commissioning Work:


- Verification of lubrication system, control system, and safety interlocks.
- Initial rolling of turbine and checking vibration, temperature, and parameters.
- Gradual loading and synchronization with grid.
- Monitoring efficiency, pressure, temperature, and vibration levels
- Documentation, testing reports, and operational clearance.

Testing:

All required tests performed during refurbishment process like Dye Penetrant test, Magnetic Particle Inspection (MPI), Ultrasonic Testing, Eddy Current Testing, Bump test, & Horn drop test.







Overhauling (Capital/Annual)

Minor Overhauling:

- Couplings: check for teeth condition, visual inspection for cracks and bend in coupling bolts. Check for radial runouts and axial float.
- Bearings: check for bearings condition- scoring, bearing clearance, bedding and D.P. test and check for fit of the bearing in bearing housing.
- Oil glands: check for radial and axial runouts if necessary to be repaired/replaced.

Bearing housings and casing supporting elements:

- spring/washers to be cleaned and assembled.
- Emergency stop valves, governing valves, bypass valves are to be opened and checked.
- Drains are to be checked for choking.
- Main oil pump to be opened-bearing, sealing rings, rotor, impeller etc., to be checked.
- Complete governing system and protection equipment to be cleaned and checked.



Major Overhauling:


In this overhaul, all elements are to be checked thoroughly including turbine casing, rotor and blading. Besides all the checks that will be done under minor overhaul, the following checks are to be carried out-

- Bearing housing is to be lifted out and the bearing is to be removed for inspection.
- Casing to be checked for parting plane clearance in free condition- parting plane to be checked. Check cracks.
- Supporting elements of inner casing to be checked.
- High temperature zone bolts are to be measured in length. Check for deformation/elongation.
- Rotor: a) Check for rubbing marks b) Check for runouts c) Check for lock blade condition d) Check for thrust collar.
- Guide blades including nozzles to be cleaned thoroughly and checks to be made for cracks.
- Oil tank to be emptied. Oil quality to be checked.
- Oil cooler: tune bundles to be taken out. Tubes to be cleaned mechanically and chemically. Check for leaks.
- Oil piping should be checked for leakages.
- Piping supports and hangers to be checked and adjusted if required.



Cooler (H2 / Air) and its auxiliaries:

- Thorough Inspection of Defective Components.
- Comprehensive Cleaning (chemical, mechanical and solvent) of Outer and Inner Section of Cooler.
- Accurate required testing performed related to Generator Cooler.
- Replacement of faulty Fins and Tubes.

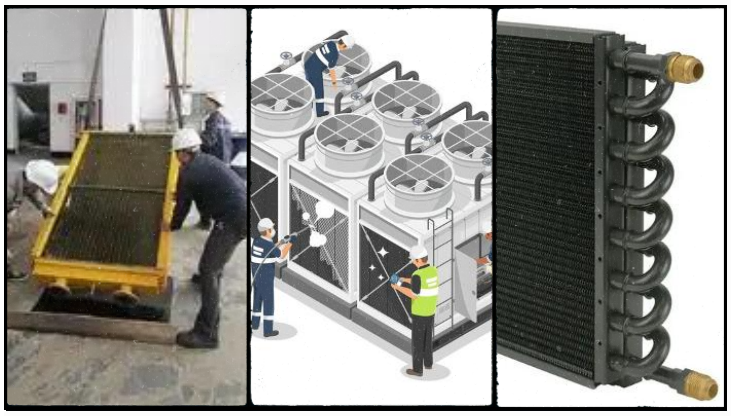

Bearing:

- Check for wear, scoring, overheating, vibration, and oil contamination.
- Removal of bearing shells and thorough cleaning of housing and components.
- Measurement of bearing clearances, alignment, and journal condition.
- Re-metalling (white metal), polishing, or replacement of damaged shells.
- Inspection of oil grooves, seals, pipelines, and flow conditions.



- Proper fitment of bearings with alignment of shaft and housing.
- Monitoring of temperature, vibration, and oil flow during trial run.

Erection, Testing and Commissioning of Generator Auxiliaries:

- Generator Neutral Adapter Box
- Work done related to Phase and Neutral Current Transformers and Assembly:
  a) Careful handling of OEM parts
- Alignment, torque and tightening works has been completed
- Phase and Neutral End-to-end matching with IBPD and its flexible link.
- CT installation and connection to neutral bus plate (star point) is done safely, avoiding damage to generator bushings and insulation.
- Welding/Cutting Work is done if required



5.3 Generator



Our Expertise

Stator and its Auxiliaries:


- Proper Inspection and cleaning of Stator Core, slots and internal components.
- All required Testing (Electrical and Mechanical) to identify the core problems.
- End Windings support tightening
- Core tightening and Wedging.
- Replacement/Repairing of faulty Bars.
- Replacement/Repairing of Windings by using High-quality copper conductors and advanced insulation systems (Class F/H).
- Replacement of Teflon, copper, nickel Tube.







Rotor and its Auxiliaries:

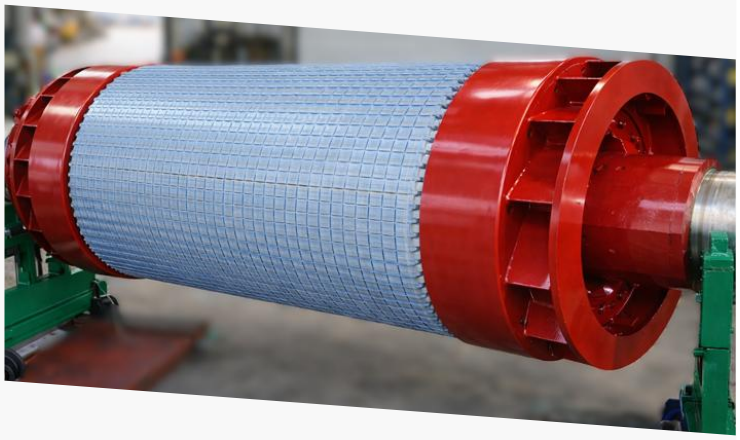

- Inspection of Rotor Winding, Shaft, Retaining Rings and Electrical health.
- Comprehensive Testing performed to check condition of external and Internal parts and identification of core problems.
- Repairing of Journal parts
- Shaft Repairing and Welding
- Rotor Face Matching process
- Wedge Repairing/Replacement
- Retaining Ring Replacement and Installation.
- Repair/Replacement of damaged Rotor Fan Blade.



TG Revamping, Refurbishment & Repair Solutions

Revamping Work

- Revamping or restoring an incomplete unit requires agile planning and highly specialized skills.
- We have successfully executed such projects and brought units into operation within record time.
- Idle or non-operational units (for years) often come with unforeseen issues and surprises.
- Proven capability to resolve these challenges and restore project momentum, ensuring on-time delivery.
- Balancing Scope, Cost, and Time is essential for successful project execution.
- we have trained and experienced professionals efficiently manage obstacles and ensure smooth project delivery.





Refurbishment Work (HP, IP,LP)

- Refurbishment of Casings, Steam Chamber, Diaphragms, Generator End Shields, H_2 Cooler Enclosures, and Pipe Flange & critical components
- Precision machining, welding, assembly, and alignment correction
- Inspection-driven, quality-controlled restoration for extended equipment life



- Steam path, sealing, and fitment optimization for improved efficiency
- Manufacturing of critical fasteners
- Enhanced reliability and reduced outage risk with OEM-standard practices
- Dynamic balancing
- Complete readiness for shutdown, overhaul, and maintenance support
- Full assembly of casings with alignment and clearance verification





Repair

- Precision repair of turbine and generator components
- Welding, machining, and fitment correction for damaged parts
- Restoration of sealing surfaces and critical joints
- On-site fault diagnosis and corrective action
- Replacement of worn or defective elements with OEM-quality parts
- Alignment verification to ensure smooth operation
- Quality-controlled repair practices to minimize downtime
- Reliable solutions that extend equipment life and improve efficiency



5.4 Boiler



Overhauling of Boiler:


Importance of Boiler Overhauling:


- **Enhances Boiler Efficiency:** Ensures optimal performance by addressing wear and tear issues.
- **Prevents Downtime:** Reduces the risk of sudden failures that can disrupt production.
- **Lifespan:** Proper maintenance can significantly increase the lifespan of the boiler.
- **Improves Safety:** Ensures the system is free from leaks, corrosion, or other hazards.

Overhauling Process:

- **Initial Inspection:** The overhauling procedure begins with a thorough inspection. Technicians assess the overall condition of the boiler, including checking for:
  a) Leaks
  b) Corrosion
  c) Scaling
  d) Burner functionality
  e) Pressure settings
- **Cleaning of Boiler Components including:**
  a) Boiler tubes
  b) Burners and fuel systems
  c) Blowers and Fans
  d) Water treatment systems
- **Shutdown and Isolation:** Before beginning the actual overhaul work, the boiler is safely shut down and isolated from the system to ensure the safety of maintenance personnel.
  This step involves:
  a) Shutting off all fuel and water supplies
  b) Locking the control systems
  c) Ensuring that pressure has been released from the system

- **Inspecting and Replacing Components:**
  a) Pressure relief valves
  b) Seals and gaskets
  c) Fuel Injectors
- **Testing and Calibration:**
  Once components are repaired or replaced, the boiler is reassembled, and operational testing begins. Experts test the following:
  a) Pressure & temperature control systems
  b) Flame detection and ignition systems
  c) Automatic controls and alarms
- **Final checks and safety assessment**
  a) Verifying pressure relief systems'integrity
  b) Double-checking electrical and control systems
  c) Ensuring compliance with safety and regulatory standards

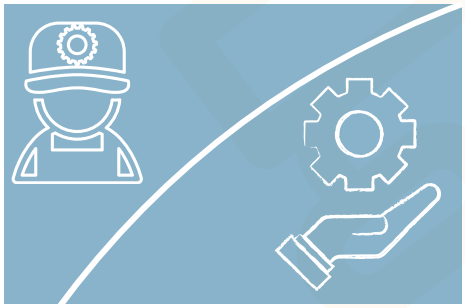

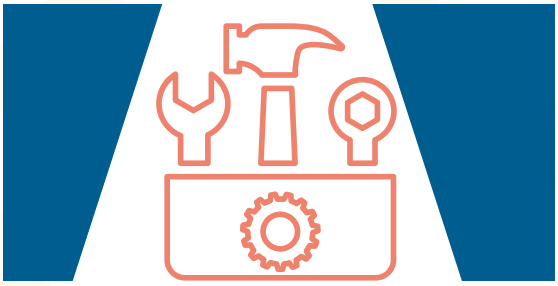


OEM-Certified Spares & Reliability Assurance

"We are pleased to offer our services as a trusted supplier of OEM-certified spare parts for thermal and hydro power plants. Our sourcing network includes globally recognized manufacturers, ensuring genuine, high-quality, and performance-assured components. Our quotation covers a wide range of critical equipment spares, including:


- Turbine, Rotor & Shaft System Components
- Generator, Electrical & Winding Components
- Compressor & Air Flow System Components
- Combustion Equipment Components
- Bearings, Seals & Mechanical Drive Components
- Pumps, Auxiliary & Balance of Plant Equipment
- Overhaul Consumables, Repair Kits & Maintenance Spares
- Critical Rotating Equipment Components


All supplied parts strictly comply with OEM specifications, international standards, and plant-specific requirements, ensuring seamless compatibility and operational reliability.

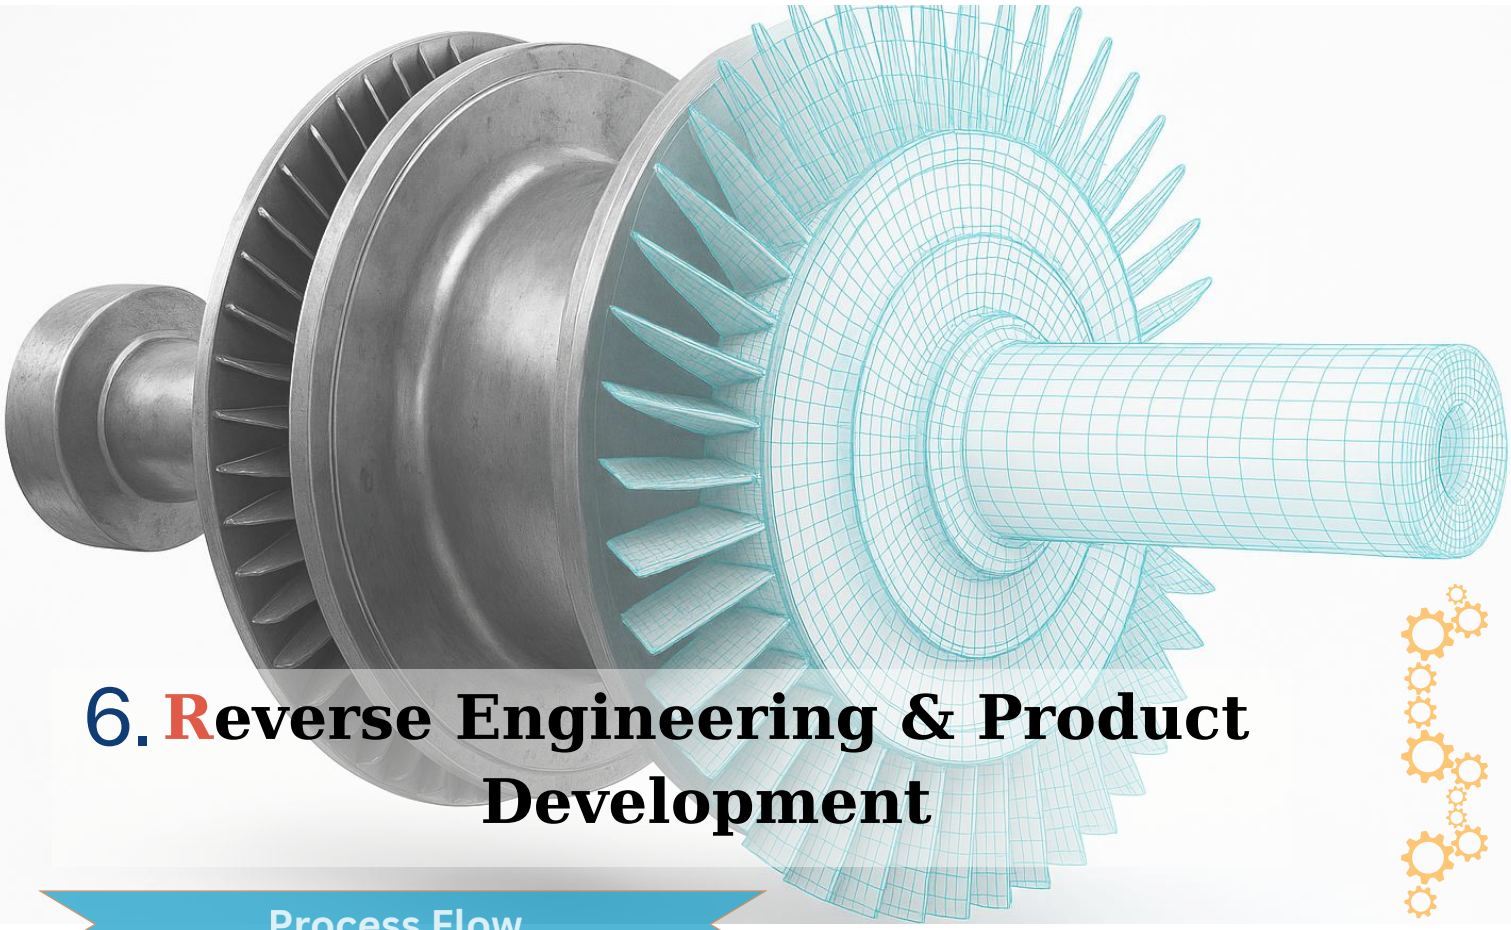

6. Reverse Engineering & Product Development

Process Flow

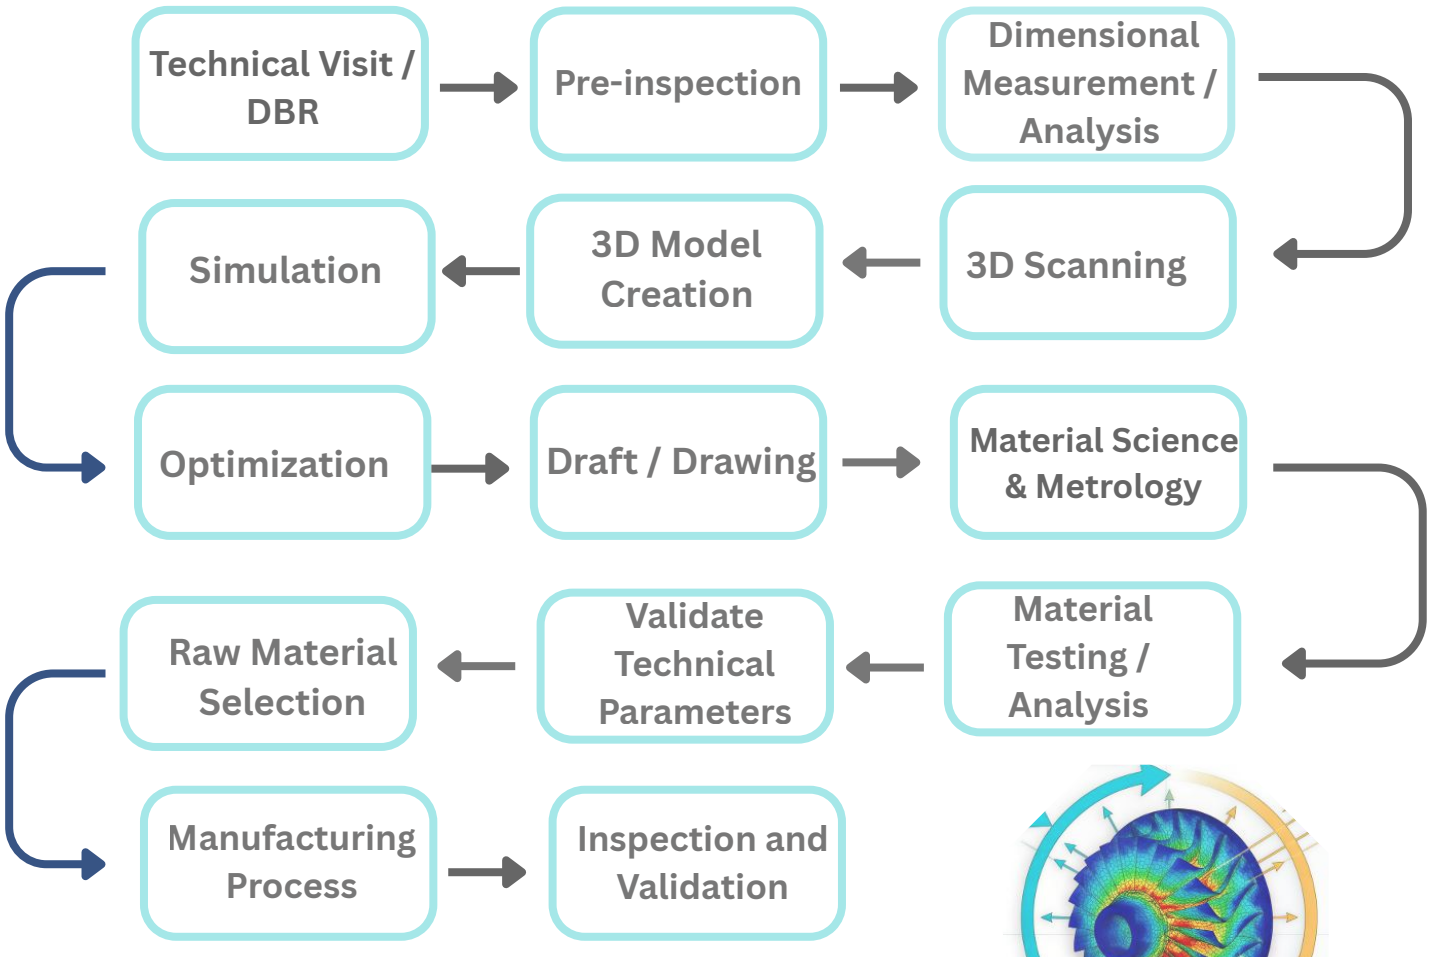






Technical Visit / DBR

Understanding the component in its actual operating environment:

- Application and functional requirement
- Load conditions and duty cycle
- Service parameters (temperature, pressure, vibration)
- Failure history and performance issues

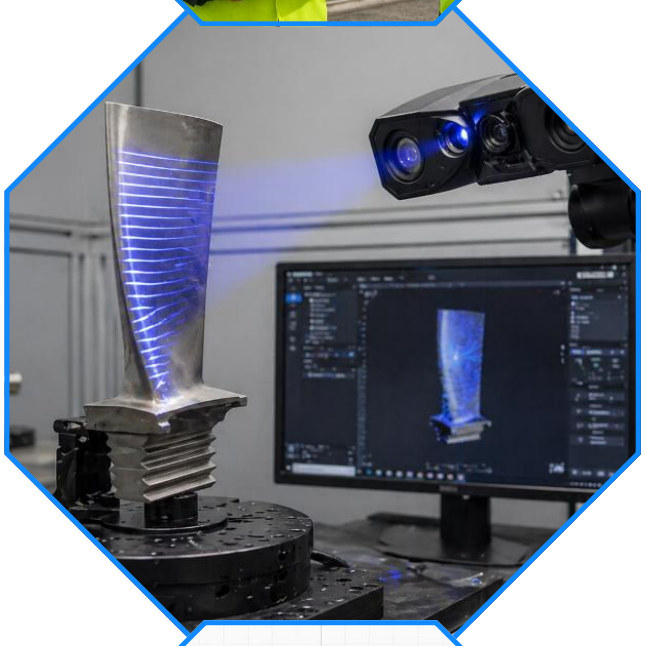

Pre-Inspection


Initial assessment of component condition:

- Visual inspection
- Identification of wear, deformation, cracks
- Corrosion and surface damage analysis
- Identification of critical areas

Dimensional Measurement / Analysis

Capturing accurate geometry:

- Use of calibrated instruments/Gauges
- Measurement of critical dimensions & fits
- Tolerance and alignment evaluation
- Functional relationship between features

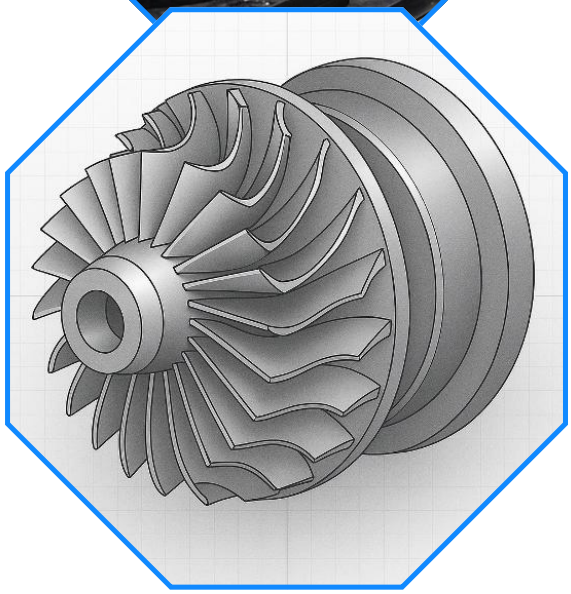

3D Scanning

For complex geometries:

- High-density point cloud capture
- Mesh generation for free form surfaces
- Accurate replication of intricate profiles
- Reduction of manual measurement limitations

3D Model Creation


Development of digital model:

- CAD model from measurement & scan data
- Geometry refinement and correction
- Preparation for simulation and manufacturing
- Design intent incorporation

Simulation

Engineering performance validation:


- Structural analysis (stress, deformation)
- Thermal analysis
- NVH (Noise, Vibration & Harshness)
- Fluid flow analysis
- Buckling and fatigue checks

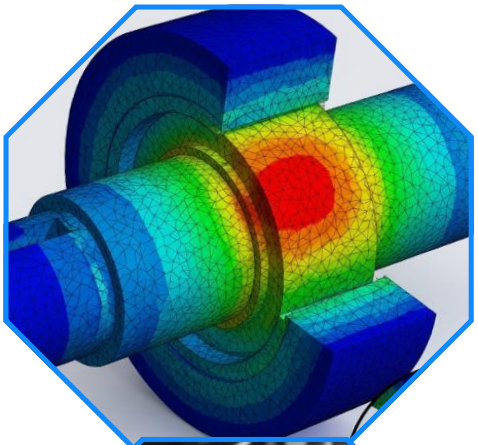

Optimization

Improving design performance:

- Weight reduction
- Strength and durability enhancement
- Life improvement
- Cost and manufacturability opmization

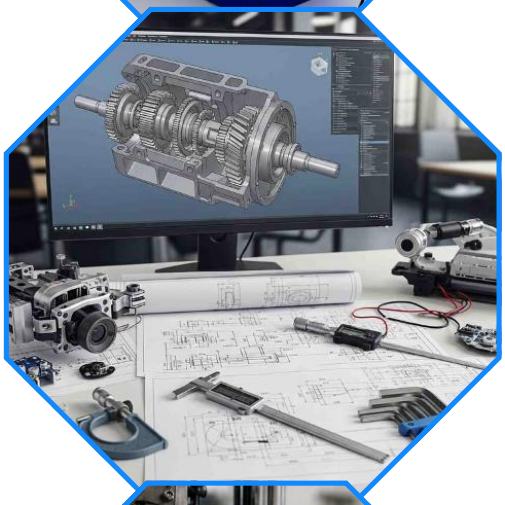

Draft / Drawing

Preparation of manufacturing documents:

- Detailed dimensions and tolerances
- GD&T specifications
- Surface finish requirements
- Manufacturing notes and standards

Material Science & Metrology

Material identification:


- Chemical composition analysis
- Mechanical properties
- Spectrometry techniques
- Grade identification or nearest equivalent
- Verification against standards



Material Testing / Analysis

Evaluation of properties:

- Mechanical testing
- Elemental analysis/testing
- Microstructural examination
- Behaviour under service conditions

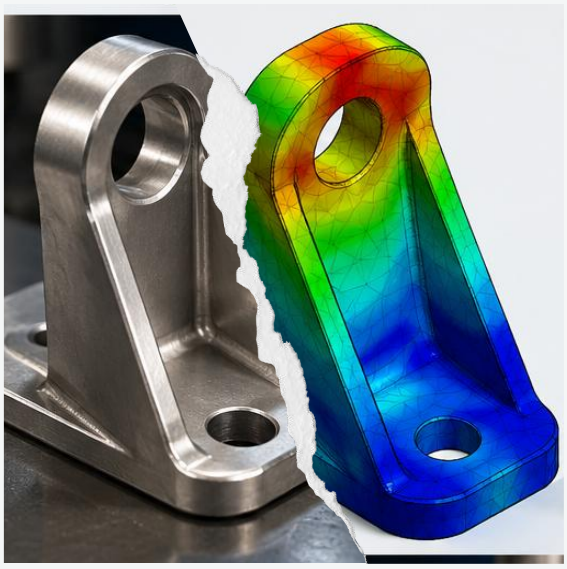

Validate Technical Parameters

Ensuring design reliability:

- Matching material + geometry with load conditions
- Verification against operating environment
- Safety and performance checks
- Compliance with functional requirements



Raw Material Selection


Final material decision:

- Selection as per national and international standards
- Review test certificates of raw materials
- Quality of raw material assurance
- Availability and cost consideration
- Performance suitability
- Manufacturability check



Manufacturing Process Execution strategy:

- Machining (precision components)
- Casting (complex geometries)
- Forging (high-strength applications)
- Fabrication (for assembly parts/structure)
- Process selection based on design and material

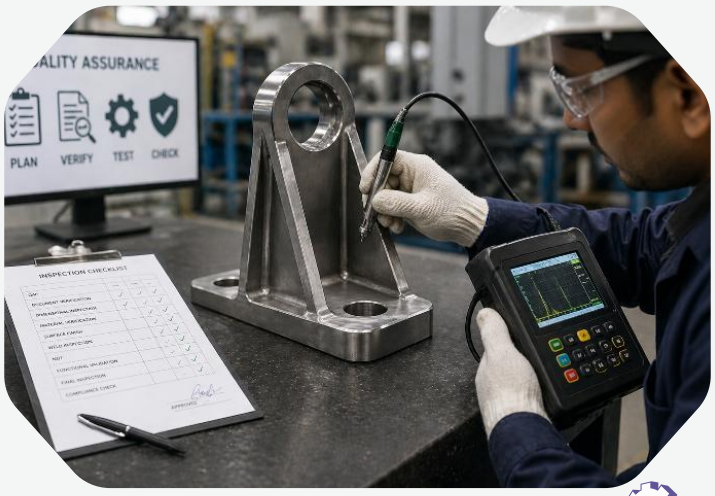

Inspection and Validation

Final quality assurance:

- Quality assurance plan (QAP)
- Verification of documents
- Functional validation
- Compliance with technical specifications

6.1 Reverse Engineering Project Portfolio

We deliver precision-driven reverse engineering solutions for critical turbine-generator components across high-capacity thermal power plants.

Capacity	Components	Work Activity
2 x 660 MW	• Casing Fasteners (Outer, Inner, Steam Chamber, End Shield) • Cross Over Pipe Fasteners (IP/LP) • Diffuser Fasteners • H_2 Cooler Encloser Fasteners • Diaphragm (4th–6th Stage) • Casing Assembly	Research, 3D Scanning, Design, GAD, Development, Reverse Engineering, Material Analysis, Testing, Procurement, Manufacturing
9 x 135 MW	• Generator Slip Ring Replacement work of U#8	Research, Design, Development, Reverse Engineering, Material Analysis, Testing, Procurement, Manufacturing
8 x 135 MW	• Slip Ring, Balancing Weight • Fan Blade, CC Bolts & Assembly • Slip Ring Fan	Research, 3D Scanning, Design, Development, Reverse Engineering, Material Analysis, Testing, Procurement, Manufacturing
4 x 135 MW	• CC Bolts Assembly • Slip Ring, Slip Ring Fan	Research, Design, Development, Reverse Engineering, Material Analysis, Testing, Procurement, Manufacturing
2 x 300 MW	• Slip Ring • Connection Ring • Gland • CC Bolts • Nut, Washer	Research, 3D Scanning, Design, Development, Reverse Engineering, Material Analysis, Testing, Procurement, Manufacturing
30 MW	• Slot Wedge • Rotor Fan, Balancing Weight, CC Bolts Assembly • Rotor Assembly	Research, Design, Development, Reverse Engineering

135–150 MW	• Slot Wedge	Research, Design, Development, Reverse Engineering
43 MW	• Balancing Weight	Research, Design, Development, Reverse Engineering
5 MW	• Gen Rotor Outer Ring • Flexible Link, Epoxy Liner Bar	Research, Design, Development, Reverse Engineering
5500 KVA	• HV/LV Transformer • Rectifier Transformer • Insulation Duct	Research, Design, Development, Reverse Engineering
2 x 660 MW	• Stud • Cap Nut • Plug Bolt • Washers	Research, Design, Development, Reverse Engineering, Material Analysis, Testing, Manufacturing







7. Tribology & Total Lubrication Reliability Solutions

Global Technical Excellence for Power Plant Engineering

Tribology is crucial for power plant reliability, impacting efficiency, maintenance costs, and asset longevity. We offer integrated Total Lubrication Reliability & Management Solutions worldwide, meeting OEM requirements and international standards.

Standards & Compliance

All solutions are executed in strict adherence to globally recognized frameworks, ensuring safety, quality, and performance:

- As per national and international standard
- OEM Specifications | Utility Protocols

Critical Equipment Coverage

Our domain expertise spans across key rotating and auxiliary assets:

- Steam & Gas Turbines
- Generators
- Boiler Feed Pump Turbines
- Gearboxes | Fans & Drives
- Cooling Tower
- Pumps, EHC Systems ,Compressors
- Balance of Plant Equipment

End-to-End Lubrication Solutions

We provide engineered lubricant selection and supply for all operating conditions:

- Mineral Oils
- Synthetic Fluids
- Turbine Oils
- Hydraulic Oils
- Gear Oils
- Compressor Oils
- High-Temperature Greases
- Fire-Resistant Fluids
- Custom Formulations

Filtration & Reliability Systems

Advanced contamination control solutions designed for maximum equipment protection:

- OEM Filters
- Varnish Removal Systems
- Ion Exchange Units
- Oil Purification
- Vacuum Dehydration
- Inline Filtration | Desiccant Breathers

Smart Monitoring & Digital Reliability

Real-time condition monitoring for predictive maintenance excellence:

- Contamination Sensors
- Moisture Monitoring
- Particle Count Systems
- Temperature / Pressure Diagnostics
- Predictive Analytics

Testing & Oil Recovery Technologies

Comprehensive oil health management and restoration:

- TAN
- MPC
- Viscosity
- Cleanliness Testing
- Particle Counting
- Oil Reconditioning
- Resin-Based Treatment
- Varnish Mitigation

Technical Expert Support

End-to-end project execution backed by engineering expertise:

- Remote & Onsite Support
- Shutdown & Outage Planning
- KPI-Based Programs
- Data-Driven Maintenance
- RCFA

Training & Capability Development

Industry-focused programs to strengthen plant reliability:

- Tribology
- Oil System Reliability
- Sampling & Analysis
- Contamination Control
- Bearing Failure Prevention
- SOP Development

Reliability-Centered Lubrication (RCL)

• Customized Online / Onsite Workshops

Total Lubrication Reliability & Management Every Solution Engineered to National & International Standards with Global OEM Alignment. Reduce Friction | Control Contamination | Build Reliability | Maximize Availability

8. Operational Governance: ‘Zero-Harm’ & Quality



Safety Protocols

- Philosophy: Zero-Harm.
- LOTO Mastery: Strict lockout/Tagout For Energy isolation.
- JSA: Mandatory daily Job safety analysis.

Quality Assurance

- Standards: Adherence to National & International standards
- Environmental:‘Repair-over-Replace’ sustainability approach.





9. ESG MANAGEMENT

Responsible Engineering. Sustainable Growth.

At JBAEL, sustainability is integral to how we operate and create long-term value. Our Environmental, Social, and Governance (ESG) framework ensures responsible growth, ethical conduct, and positive impact across all stakeholders.

Environmental Responsibility

We are committed to reducing environmental impact through efficient resource use, cleaner technologies, and responsible waste management. By integrating sustainability into our operations, we support long-term environmental resilience.
Social Responsibility

Social Responsibility

JBAEL prioritizes people, safety, and inclusive growth. We foster a safe work environment, invest in skill development, uphold ethical labor practices, and contribute to community development wherever we operate.



Governance & Ethics

Strong governance is the foundation of trust at JBAEL. We follow transparent processes, robust compliance systems, and ethical business practices to ensure accountability and integrity at every level.

Our Commitment

By embedding ESG principles into our strategy and operations, JBAEL engineers solutions that are innovative, responsible, and future-ready."







Successfully Executed Projects

Thermal Power Plant

S.N	CUSTOMER DETAIL	CAPACITY	OEM	TITLE	YEAR OF EXECUTION
1	Adani Korba Power Limited	2x600 MW	HTC	Refurbishment of TG components, including LP Outer Casing, LP Inner Casing, LP Steam Chamber, LP Diaphragms, Generator End Shields, Generator H_2 Cooler Enclosures, and HIP Outer Casing, along with complete assembly of the LP Outer & Inner Casing including all internal components, with a supply of OEM TG fasteners.	2026
2	JSW Steel Vijayanagar	57MW	SIEMENS	Complete erection, installation, testing, and commissioning of 57 MW Turbine, Generator, and its auxiliaries, including all associated auxiliaries, pipelines, pumps, valves, and actuators.	2026
3	Shyam Metalics and Energy Limited	30MW	JPEF	Generator Stator Rewinding 30MW	2026
4	Supermech infrastructure Pvt.Ltd.	300 MW	SEC	Repair of Generator Rotor journal at TE and EE sides	2026
5	Korba Power Limited	2 x 660 MW	DEC	Erection, Testing, and Commissioning of CT and Neutral Adaptor Box U#3 & 4	2026
6	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	COH of Turbine, Generator, and its auxiliaries U#8 with Front Pedestal correction (LP differential expansion problem)	2026
7	DB Power Limited	2x600 MW	BHEL	J STRAP Replacement of Generator rotor	2026
8	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	Generator Rotor Repair	2026
9	Shyam Metalics and Energy Limited	45 MW	JPEF	Generator Rotor Repair with Dynamic Balancing	2026
10	Shyam SEL & Power Limited	30 MW	JPEF	Generator Rotor Overhauling	2026
11	Vedanta-Bharat Aluminium Company Limited	4 x135 MW	JPEF	Erection of Newly Supplied Generator Stator	2026
12	R.K.M Powergen Private Limited, Chhattisgarh	4 x 360 MW	HTC	COH of Unit#3	2026
13	ACWA POWER NOMAC, OMAN	320 MW	GE	Generator Stator Winding Partial Discharge Repair	2026
14	Vedanta Limited - Jharsugoda	600MW	HTC	Turbine & Valve AOH Of U#4	2025
15	R.K.M Powergen Private Limited	4 x 360MW	HTC	Bearing Inspection And COH Of HIP Turbine Including Steam Valves Of Unit#1	2025
16	Shyam Metalics and Energy Limited	33MW	JPEF	Generator Rotor Repair 33MW	2025
17	NTPC GE Power Services Private Limited	4 x 135 MW	HTC	Generator COH 135MW U#2	2025
18	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	Repair of 135MW Generator Rotor Including Dynamic Balancing,	2025
19	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	Generator Stator Repair U#2	2025
20	JSW Energy (Utkal) Limited, Orissa	2 x 350MW	HTC	AOH of TG Auxiliaries U#1	2025
21	Sarda Energy & Minerals Limited	2 x 300MW	HTC	Rectification of Generator Exciter U#2	2025

22	Jindal Stainless Limited, Jaipur	2 x 125 MW	BHEL	Retaining ring inspection, stator wedge partial replacement, in-situ balancing, LP turbine and bearing overhauling, lube oil pump revisioning, generator rotor and bearing inspection, and complete TG overhauling.	2024
23	JSW Ind-Barath Energy (Utkal) Limited	2 x 350MW	HTC	Erection and Commissioning of U#2 TG, valves, TDBFP and its Auxiliaries, Manpower support for O&M services along with tools & consumables	2024
24	JSW Ind-Barath Energy (Utkal) Limited	2 x 350MW	HTC	Erection and Revival of Unit #1 Turbine, Generator, Valves, Turbine-Driven Boiler Feed Pump (TDBFP), and Associated Auxiliaries	2024
25	Adani-Korba Power Limited	2 X 660MW	HTC	End-to-end physical inspection and condition assessment of the TG and associated auxiliary systems.	2024
26	SKS Power Generation (Chhattisgarh) Limited	2 x 300MW	HTC	LP turbine and generator overhauling with bearing, turning gear, and main control valve (TV/IP/GV) servicing	2024
27	Mahan Energen Limited	2 x 600 MW	HTC	Major Overhauling of TG Auxiliaries	2024
28	Mahan Energen Limited	2 x 600 MW	HTC	Major Overhauling of TDBFP Turbine	2024
29	JSW Energy (Barmer) Limited	8 x 135 MW	JPEF	Generator Stator & Rotor Overhauling and Electrical Testing	2024
30	Sembcorp Energy India Limited	2 x 660 MW	DEC	Expert Supervision for 660 MW COH	2024
31	JSW Steel Vijayanagar Works	130 MW	BHEL	Capital Overhauling of TG & Auxiliaries	2024
32	JSW Energy (Barmer) Limited	8 x 135MW	DEC	Repair of LP Rotor	2024
33	Vedanta Alumina Refinery, Lanjigarh	130MW	HTC	C50 Turbine troubleshooting work (Valve, Governing System & C&I)	2024
34	Vedanta Alumina Refinery, Lanjigarh	60 MW	JPEF	Restoration / Troubleshooting Services of C50 Turbine & Generator	2024
35	ACB India Limited, Korba	2 x 135 MW	HTC	Major COH of Unit-1 turbine and generator, including blade repair/re-blading, governing valve refurbishment, seal ring replacement, and complete generator rotor rewinding.	2024
36	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	Repair of Generator Rotor U#8	2024
37	Vedanta Limited , Jharsuguda	9 x 135MW	SEC	Generator Slip Ring Replacement work of U#8	2024
38	Shyam Metalics and Energy Limited	30MW	JPEF	Generator Rotor Bottom Bar Replacement	2023
39	Lanco Power Limited, Anpara	2 x 600MW	DEC	Identification of Generator Bar Leakage TOP/Bottom	2023
40	Bharat Aluminium Company Limited	4 x 135MW	JPEF	U#1 Overhauling of Generator Rotor and Stator	2023
41	Bharat Aluminium Company Limited	4 x 135 MW	JPEF	Overhauling of Generator Rotor and Stator of U#2	2023
42	Tanjung Awar-Awar Power Station, Indonesia	2x350MW	HTC	Generator Stator 2Nos Top Bar installation work	2023
43	Lakvijaya Power Station, Sri Lanka	300MW	HTC	Slipring (collector ring) Grinding and polishing on site	2023
44	JSW Energy (Barmer) Limited	8 x 135MW	DEC	LP Turbine OH, Rotor Replacement and Bearing inspection 1 to 5	2023
45	JSW Steel Vijayanagar Works	2 x 300MW	SEC	SBU2 U1 TG & Auxiliaries COH Work	2023
46	GMR Kamalanga Energy Limited	3 x 350MW	DEC	Expert Supervision Service for 350MW Turbine COH	2023
47	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	Generator Capital Overhauling & Generator Electrical Testing & Repair	2023
48	The Sandur Manganese & Iron Ores Limited	32MW	JPEF	Repair of Generator Rotor & Retaining Ring Removal and Inspection Work	2023
49	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	Generator Rotor Thread in-out, Electrical Testing and Slot wedge Replacement	2023
50	Mukund Limited	15MW	JPEF	Retaining Ring Removal and assembly work	2023

51	Adani Power (Jharkhand) Limited	2 x 800 MW	DEC	Deputation of C&I Expert for Commissioning of Unit 2 TDBFP System	2023
52	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	Servicing and testing of Generator Stator and Rotor	2023
53	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	Generator Stator Fault Repair	2023
54	JSW Ratnagiri Power Station	4 x 300MW	SEC	Repair of Generator Exciter Rotor	2023
55	Sembcorp Energy India Limited, Nellore	2 x 660MW	Harbin	Expert Supervision for Capital Overhauling	2022
56	Jhajjar Power Limited (JPL)	2 x 660 MW	DEC	Generator Inspection of U#1 & Generator Rotor CC Bolt Repair work	2023
57	Adani Power (Jharkhand) Limited	2 x 800 MW	DEC	Deputation of C&I Expert for Commissioning of Unit 1 TDBFP System	2023
58	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	Repair and Commissioning of Generator Rotor and Stator	2023
59	JSW Energy (Barmer) Limited	8 x 135 MW	JPEF	Generator Rotor Retaining Ring and Stator Testing and Servicing	2023
60	Ramsarup Industries Limited, Kharagpur	20MW	JPEF	Repairing of Generator Rotor and Exciter stator	2023
61	Nirma Limited, Bhavnagar	70MW	BHEL	Expert Supervision during Generator Overhauling and Electrical testing and Repair of Generator Rotor	2023
62	JSW Energy (Barmer) Limited	8 x 135 MW	DEC	LP Turbine Last stage complete Blade Replacement	2022
63	Ceylon Electricity Board Sri-Lanka	3x300MW	HTC	Turbo Generator Slip Ring Grinding and Polishing	2022
64	Siemens Ltd.	120MW	BHEL	Complete Turbo Generator Rotor Rewind	2022
65	Bharat Aluminium Company Limited	4 x 300MW	DEC	Turbo Generator Slip Ring Replacement	2022
66	NTPC Limited - Mauda	500 MW	BHEL	Generator Rotor CC bolt Repair	2022
67	R.K.M Powergen Private Limited, Chhatisgarh	4 x 360 MW	HTC	Stator and Rotor repair , Erection/ Commissioning	2021
68	Bharat Aluminium Company Limited	4 x 135MW	JPEF	New Generator Erection and Commissioning	2021
69	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	Generator Stator Repair Testing and Commissioning	2019
70	JSW Energy (Barmer) Limited	8 x 135MW	JPEF	Repair of Generator Rotor	2018


Hydro Power Plant

S.N	CUSTOMER DETAIL	CAPACITY	OEM	TITLE	YEAR OF EXECUTION
1	Himachal Pradesh State Electricity Board Limited, Larji	3 x 42 MW	BHEL	Removal of Pole from rim and repair, Refurbishment/soldering of rotor poles joint & testing	2026
2	Priyadarshini Jurala Hydroelectric Project	6x39MW	HTC	Dis-assembly of failed winding and stator core, replacement of entire stator core and Rewinding of Stator, and recommissioning of Unit-3	2025
3	Karnataka Power Corporation Limited	6 x 150MW	Andritz	repair, testing, and F class insulating materials supply for a large electric generator (specifically focusing on the stator winding and rotor poles).	2023
4	E2C Imboulou Power Station, Africa	4x30 MW	HTC	Generator Stator Rotor and Transformer Repair.	2022
5	Telangana State Power Generation Corporation Limited, Jurala	6 x 39MW	HTC	Complete Stator and Rotor Winding with erection and commissioning	2021

Successfully Supplied Spares

Sr. No.	Customer Name	Capacity	OEM	Components/Equipment Details
1	Jindal Power Limited , Shimapuri	4 X 150 MW	HEC	Turbine Critical Components
2	Korba Power Limited	2 x 660 MW	HEC	TG AUX Components
3	Vedanta – Athena Chhattisgarh Power Limited	2 x 600MW	DEC	Turbine Components
4	Sarda Energy & Minerals Limited	2 x 300MW	HEC	Blower assly and brush box
5	Korba Power Limited	2 x 660 MW	HEC	TDBFP Components
6	Korba Power Limited	2 x 660 MW	HEC	Turbine Valves
7	Korba Power Limited	2 x 660 MW	HEC	Generator Components
8	JSW Ind-Barath Energy (Utkal) Limited	2 x 350MW	HEC	Boiler & Utility Service Pumps
9	Jindal Power Limited , Shimapuri	4 x 150 MW	HEC	Steam & Feed Water Control Valves
10	Sharda energy	2 X 300 MW	HEC	Blader, Accumulator, Throttle Valve
11	Shayam Metalics	2 x 30MW	HTC	Emergency Oil Pump & Teflon Seal Assembly
12	Korba Power Limited	2 x 660 MW	HEC	Quick Non-Return Valve (QNRV)
13	Jindal Power Limited , Shimapuri	4 x 150 MW	HEC	TG Components
14	SARDA ENERGY & MINERALS LIMITED	2 X 300MW	HEC	High Voltage Transformer Bushing
15	Vedanta – Athena Chhattisgarh Power Limited	2 x 600MW	DEC	High Pressure Critical Piping System
16	Korba Power Limited	2 x 660 MW	HEC	Turbine Seal Segments
17	Mahan Energen Limited	2 x 600 MW	HEC	Generator spares
18	Vedanta – Athena Chhattisgarh Power Limited	2 x 600MW	DEC	Boiler Platen Superheater Header
19	Vedanta – Athena Chhattisgarh Power Limited	2 x 600MW	DEC	Fasteners
20	Vedanta – Athena Chhattisgarh Power Limited	2 x 600MW	DEC	Boiler Drain & Vent Valves
21	Sarda Energy & Minerals Limited	2 x 300 MW	HEC	Blade for PA Fan
22	Korba Power Limited	2 x 660 MW	HEC	Generator Bus Duct Rigid Spacer
23	Bharat Aluminium Company Limited	4 x 135 MW	DEC	High Pressure Feed Water Heater
24	Korba Power Limited	2 x 660 MW	HEC	Diaphragms Seals
25	Vedanta – Athena Chhattisgarh Power Limited	2 x 600MW	DEC	Condenser water gasket
26	Mahan Energen Limited	2 x 600 MW	HEC	Steam Dump Valve

27	Vedanta – Athena Chhattisgarh Power Limited	2 X 600MW	DEC	Turbo Driven Boiler Feed Pump Parts
28	Bharat Aluminium Company Limited	4 x 135 MW	DEC	Auxiliary Service Pump
29	Vedanta – Athena Chhattisgarh Power Limited	2 X 600MW	DEC	Turbine & Pump Coupling Bolts
30	R.K.M Powergen Private Limited, Chhatisgarh	4 x 360MW	HEC	Critical Turbine Spares
31	Mahan Energen Limited	2 x 600 MW	HEC	Generator spares and materials
32	SEIL Energy India Limited	2 x 660 MW	HEC	Fast cooling device
33	R.K.M Powergen Private Limited, Chhatisgarh	4 x 360MW	HEC	Quick cooling device for turbine
34	JSW Ind-Barath Energy (Utkal) Limited	2 x 350MW	HEC	Generator Fan
35	Nuvoco Vistas Corporation Limited Nimbol Cement Plant	4.72MW	QJPS	Supply of QJPS Make Turbine Spares
36	Essar Power Gujarat Limited	2 x 600 MW	HEC	Generator top and bottom stator bars with Its connection bars
37	SKS ISPAT And power Limited	2 x 300 MW	HEC	Exciter Wheel Assembaly
38	MB Power limited, Annupur	2 X 600 MW	HEC	IPCV bonnet Studs & Nut

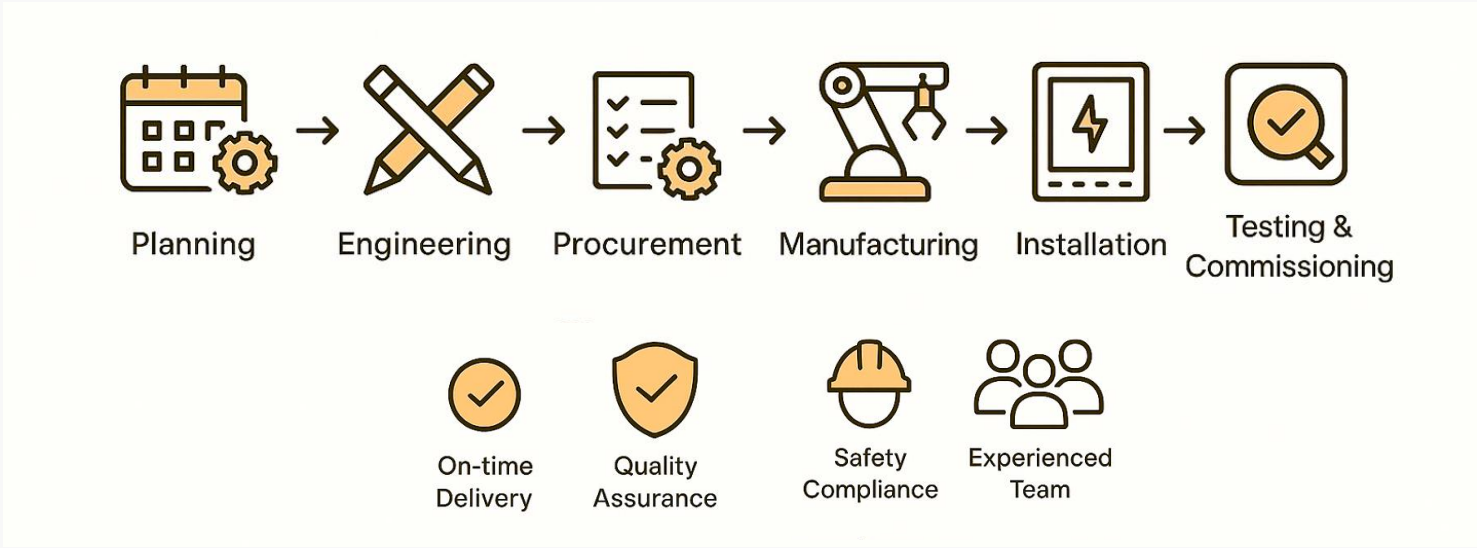

"From concept to commissioning, we ensure precision at every step."

11. Trusted By Industry Leaders



Utilities: Central & State Grids (4MW-800MW)

12. Central Office, Administration & Manufacturing Facility



Administrative Office

Ground Floor, 1/6 , Anjani complex premises CHSL, Pareira hill road, Nr. W.E highway, Andheri East, Mumbai Suburban, Maharashtra 400099

Central Office



A 204, Sahyog Atrium, Behind Jagadish Foods, Haribhakti Extension, Diwalipura, Vadodara,Gujarat-390007



Manufacturing facility

Block No. 143 and 144, Tundave, TAL. Savli, Vadodara, Gujarat - 391775

ISO 9001:2015
Quality Management System

ISO 14001:2015
Environmental Management System

ISO 45001:2018
Health and Safety Management System

E-mail:

info@jbepower.com

Website:

www.jbepower.com

Contact:

+919698320831,
+919136020760

"Driven by precision, built on trust, and engineered for generations of reliable power."